

SHREDDED PINE SOFTFALL

Description

Made from crushed raw pine slivers from sustainable sources in Western Australia.

Pine slivers ranging in size from 6-25mm graded for playgrounds.

Certification



Australian Standard
AS 4422 LicSMK40536

Insist on Australian Standard certification.

Recommended Use


Suitable for outdoor play and activity areas.

Apply to play and activity area to a depth of 300mm to comply with Australian Standard AS 4422.

Benefits

Provides peace of mind regarding the safety of your play and activity area as:

- Protects against injuries from tripping and abrasion
- Protects against injuries from falls as provides cushioning and absorbs shock
- Non toxic, safe to handle and will not stain clothes
- Made from sustainably sourced material

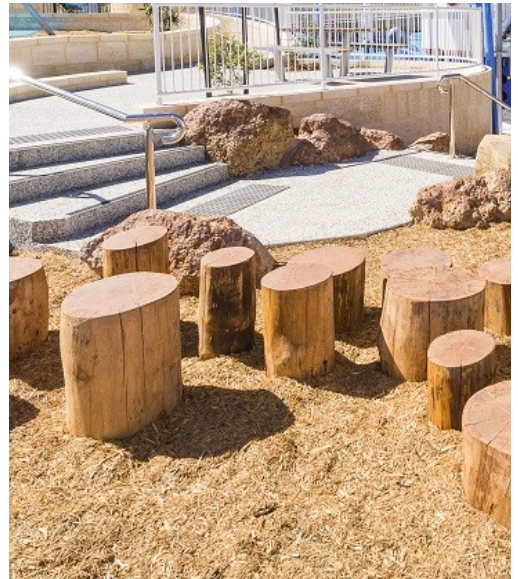

ORDERING

This product is available in bulk loads 15m³ or greater and in bulk bags of 1m³ with a minimum order of 15 bags.

Call T.J. Depiazzi & Sons direct on (08) 9728 1152 or visit www.depiazzi.com.au to order.

ABN 82 153 384 202
148 Depiazzi Road
Dardanup WA 6236
P (08) 9728 1152
F (08) 9728 1239
E tjdepiazziadmin@westnet.com.au
W www.depiazzi.com.au

Depiazzi .com.au

SHREDDED PINE SOFTFALL

Application

Use in all play and activity areas where a fall height of over 60cm may occur.

Apply to a minimum depth of 300mm around and underneath all play equipment. This allows for a maximum fall height of 4.1m. If the fall height is greater than 4.1m increase the depth of application.

In high traffic areas it is also advisable to increase the depth to 360mm.

Maintenance & Inspection

Regularly rake the material every 3 to 6 months depending on traffic conditions and compaction rates.

Due to traffic and weather, the loose Shredded Pine Softfall may displace and deteriorate at different rates. This can result in the coverage not having the required impact protection.

We recommend that regular inspections are carried out to ensure the correct depth is maintained and topped up as required.

Insert a half metre ruler until it hits the ground below and measure the depth. When the depth falls below 200mm top up with extra Shredded Pine Softfall.


Fall Zones

A person falling from heights on play equipment does not necessarily fall straight down. Due to height and movement of equipment or the activity of the person they may fall further away. This is called the fall zone.


Shredded Pine Softfall is required to be installed to a depth of 300mm in the fall zone and there should not be any hazards in this zone.

If accurate fall zones have not been provided or are not known, we recommend that a zone of 2.5m is provided around the equipment in all directions. If in closely supervised areas this fall zone may be reduced to 1.9m.

If the equipment has moving components the fall zone must be calculated from the furthest extension of this equipment.



300 min depth
under and around
all equipment



360 min depth
heavy traffic areas

